


HOW TO INSTALL VENETIAN BLINDS | ALUMINIUM



Items Checklist

- Venetian Blind
- 1 pair of Hold Down Clips
- 2 screws per brackets
- Bracket(s) - Amount varies depending on blind width

Tools Required

- Cordless Drill with Philips head drill bit
- Metal Tape Measure

It is important to securely attach the brackets to the mounting surface. To achieve this the included screws must secure into wood studs, otherwise a fastener is required for secure mounting (not included).


PLASTER	TIMBER	CONCRETE, STONE, BRICK or TILE
We recommend the use of the Ramset 10mm Grip Hollow Wall Anchor	Pre-drill holes and use the included screws	Use a masonry drill and appropriate plugs, anchors or screws

HOW TO INSTALL VENETIAN BLINDS | ALUMINIUM


1. Position

As per your order, determine where you blind is to be fitted

- RECESS FIT - Inside your window frame
- FACE FIT - on the window frame or wall

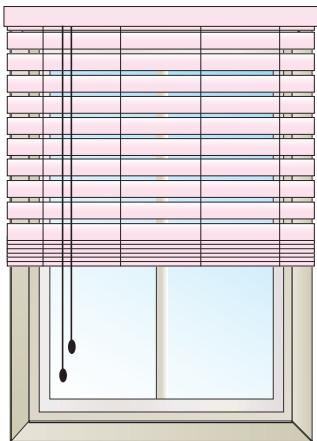


FACE FIT


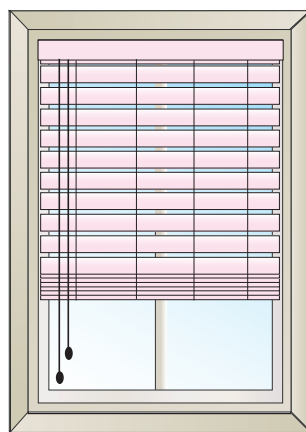


RECESS FIT

RECESS FIT



FACE FIT




HOW TO INSTALL VENETIAN BLINDS | ALUMINIUM

2. Installing the Brackets

- a) Position outer brackets approximately 100mm from the edge of the blind and space the remaining brackets evenly across the width of the blind. (make sure the brackets will not interfere with the operation of the tilt mechanism before installing)
- b) Mark if necessary and ensure all brackets are level. Pre drill 2 holes per bracket and secure the brackets with the screws included. (Wood screws have been provided, however screws suitable for gyprock or brick walls may need to be purchased)

3. Positioning The Blind

- a) Care must be taken when lifting Roman blinds. Ensure that the head rail is fully supported at all times and that all brackets are in place before positioning
- b) Place the front hooks of the bracket inside the front edges of the head rail
- c) When evenly in position, rotate the back of the head rail into the rear of the bracket until it clicks into place.

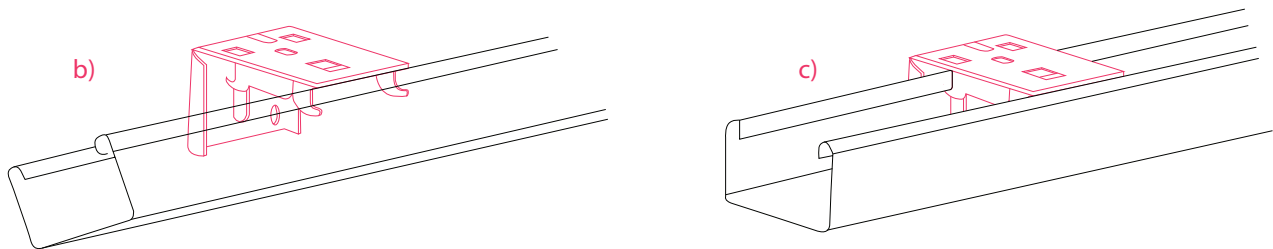

Child Safety

All blinds are supplied with Child Safety devices. It is the responsibility of the person installing the blinds to make sure these are installed and that warning tags are to remain on the blinds.



WARNING CHILD SAFETY WITH LOOPED CORDS, CHAINS & BEAD CORDS

Young children can strangle in the loop of pull cords, chain and bead cords, and cords that run through window coverings. They can also wrap cords around their necks. To avoid strangulation, keep cords out of the reach of young children. Also,

1. Install safety devices that remove the cord loop or reduce access to cords, and
2. Move cots and furniture away from window covering cords.

The tension device reduces the hazards of strangulation or entanglement by limited access to the cord or bead chain. Anchor the device with the cord or bead chain to the wall or floor so young children cannot pull the cord or bead chain around their necks. Always keep cords out of the reach of young children.

WARNING REGARDING CLEATS: Cleats should be mounted at a sufficient height, so as to keep cords out of reach of young children. Cords must be fully wrapped around the cleat at all times. Always keep out of the reach of young children.

WARNING FOR CORD RELEASE DEVICE: This cord release device reduces the strangulation hazard in the pull cord by removing the permanent loop. The cords should not be tied together and the cords should not be twisted around each other when the device is assembled. This device will not prevent strangulation if young children wrap pull cords around their necks. Always keep cords out of reach of young children.

5 Year
Warranty

www.diyonlineblinds.com.au

**Best Price
Guarantee 10%**
Or we'll beat it by
www.diyonlineblinds.com.au

**Australian
Made &
Owned** 
www.diyonlineblinds.com.au

For further information please contact our dedicated customer service team between Monday to Friday 9AM to 9PM or Saturday to Sunday 10AM to 5PM.

Phone: 1300 918 390 **Email:** sales@diyonlineblinds.com.au

